

ST7

MONOBLOC

MONOBLOCK

Este toldo autosustentado sobre tubo cuadrado con soporte de brazo remoto es ideal para espacios de gran envergadura.


This self-supporting awning on a square tube with remote arm support is ideal for large spaces.

ST7 MONOBLOC

MONOBLOCK



Soporte de brazo **REMOTO**
REMOTE arm support

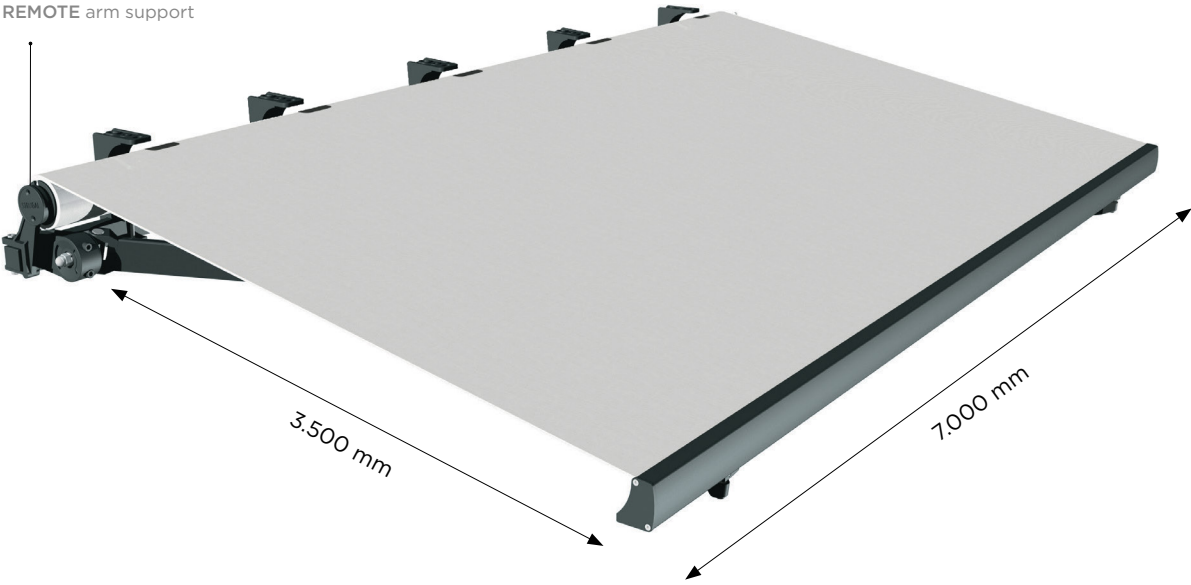


SUJECCIÓN

Fastening

■ DIFERENTES POSIBILIDADES

Different options



A techo
Mounted to
ceiling




Frontal
Front

INCLINACIÓN

Angle

■ De 0 a 90°




Medidas en mm. Measurements in mm.

SOPORTE

Support


■ VISTA FRONTAL

Front view

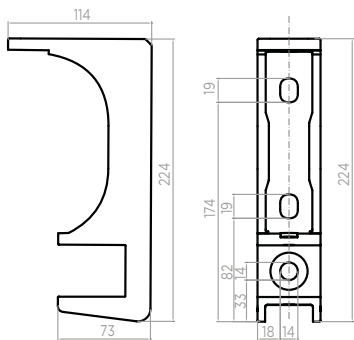

■ VISTA SUPERIOR

Top view



CARACTERÍSTICAS TÉCNICAS

Technical characteristics

CARACTERÍSTICAS

Features

- ▶ Toldo autoportante sobre tubo de acero. Self-supporting awning on steel tube.
- ▶ Soporte de brazo remoto (ideal toldos gran envergadura). Remote arm support (ideal for large awnings).
- ▶ Fijación simplificada con soporte múltiple (fachada y techo). Simplified fixing with multiple support (façade and roof).
- ▶ Ajuste de orientación muy simple con acceso rápido a tornillos de ajuste. Very simple orientation adjustment with quick access to adjustment screws.
- ▶ Resistencia al viento según Norma UNE-EN13561:2015. Wind resistance according to Standard UNE-EN 13561:2015.

DIMENSIONES

Measurements

	Máxima Maximum	Mínima Minimum
➤ Salida Projection	3.500 mm	1.500 mm
↔ Línea Width	7.000 mm	2.100 mm

⚠ A partir de 6.000 mm de línea, se incorpora un brazo extra para mayor estabilidad. For lines 6,000 mm and longer, an additional arm is fitted to provide greater stability.

INSTALACIONES HABITUALES

Standard installations



Ventanas
Windows



Balcones
Balconies



Terrazas
Terraces



Horeca
Hospitality

ACCIONAMIENTOS

Actuators



Manual
Manual



Motorizado
Motorised

RESISTENCIA AL VIENTO

Wind resistance

SALIDA DE BRAZO (mm) Arm projection (mm)	LÍNEA (mm) Width (mm)										
	2.100	2.500	3.000	3.500	4.000	4.500	5.000	5.500	6.000	6.500	7.000
1.500											
1.750											
2.000											
2.250											
2.500											
2.750											
3.000											
3.250											
3.500											

LÍNEA MÍNIMA (en función de salida brazo)

Minimum width (depending on projection)

SALIDA BRAZO (mm) Arm projection (mm)	1.500	1.750	2.000	2.250	2.500	2.750	3.000	3.250	3.500
LÍNEA MÍNIMA (mm) Minimum width (mm)	2.100	2.350	2.600	2.850	3.100	3.350	3.600	3.850	4.100