

PLANIA

Sistema para ventanas y puertas abisagradas de 76 mm de profundidad de marco y una capacidad máxima de acristalado de 49 mm.


Su perfilería de doble junta, con **6 cámaras interiores en marco y 7 cámaras interiores en hoja semi-enrasada**, le confiere una gran eficiencia energética con valores de transmitancia térmica U_w desde 0,82 W/m²K convirtiéndolo así en el ventanal idóneo para garantizar el cumplimiento de las normativas más exigentes aplicables a cualquier zona climática.

Presenta dos estéticas en el diseño de las hojas: semienrasada y recta.

System for windows and hinged doors with a frame depth of 76 mm and a maximum glazing capacity of 49mm.

Its double-seal profiles, with **6 interior chambers in the frame and 7 interior chambers in the semi-flush sash**, make it highly energy efficient, with thermal transmittance values U_w from 0.82 W/m²K. This makes it the ideal window to guarantee compliance with the most demanding regulations applicable to any climate zone.

There are two aesthetics in the design of the sash: semi-flush and straight.

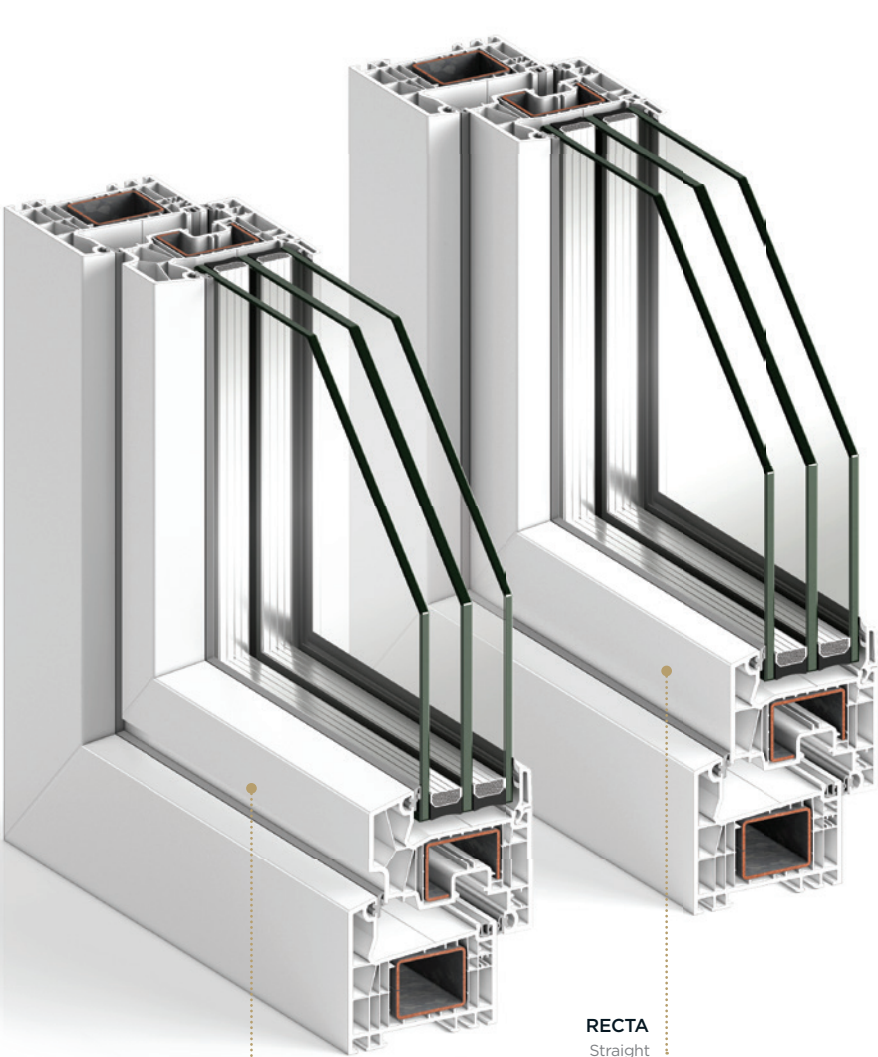


SEMIENRASADA
Semi-flush


RECTA
Straight



Posibilidad unión SIN HUELLA en las caras foliadas
Possibility of JOINING WITHOUT MARKS on laminated surfaces



HOJA PUERTA
Door sash



HOJA PUERTA CON PERFIL SOLERA
Door sash with profile sill

CARACTERÍSTICAS TÉCNICAS
Technical features

SECCIONES Sections	Marco: 76 mm Frame		Hoja: 76 mm / 84mm Sash								
MÁXIMO ACRISTALAMIENTO Maximum glazing	49 mm										
DIMENSIONES MÁXIMAS POR HOJA Maximum dimensions per sash	VENTANA Window	ANCHO (L) 1.400 mm Width 1,400 mm	ALTO (H) 2.450 mm Height 2,450 mm	Concebida con perfil divisor de hojas o cordón de pegado entre vidrio y hoja. Designed with a sash divider profile or gluing bead between glass and sash.							
	BALCONERA Balcony window	ANCHO (L) 1.400 mm Width 1,400 mm	ALTO (H) 2.450 mm Height 2,450 mm								
	PUERTA Door	ANCHO (L) 1.300 mm Width 1,300 mm	ALTO (H) 2.500 mm Height 2,500 mm								
PESO MÁXIMO POR HOJA Maximum weight per sash	130 kg Balconera / Puerta 200 kg 130 kgs Balcony window / Door 200 kgs		Consultar peso y dimensiones máximas para el resto de tipologías. Consult weight and maximum dimensions for other typologies.								
AISLAMIENTO ACÚSTICO Acoustic insulation	$R_w \leq 44$ dB										
TRANSMITANCIA TÉRMICA Thermal transmittance	$U_w \geq 0,82$ (W/m²K)		Consultar tipología, dimensión y vidrio. $U_w \geq 0.82$ (W/m²K). Consult type size and glass.								
PERMEABILIDAD AL AIRE Air permeability	CLASE 1		CLASE 2	CLASE 3	CLASE 4	UNE-EN 12207					
ESTANQUIDAD AL AGUA Watertightness	1A	2A	3A	4A	5A	6A	7A	8A	9A	E1650	UNE-EN 12208
RESISTENCIA AL VIENTO Wind resistance	C1		C2	C3	C4	C5	UNE-EN 12210				
Ensayo de referencia, ventana de 2 hojas 1.230x1.665 mm, compacto motorizado, herraje de seguridad y bandeja de vierteagua Reference essay, 2-leaf window 1,230x1,665 mm, motorized compact, security hardware, and drip tray.											

APERTURAS
Opening

Apertura interior: Practicable, oscilo-batiente, oscilo paralela, abatible y plegable.
Interior opening: Hinged, tilt & turn, tilt and slide and awning.
Apertura exterior: Practicable. Exterior opening: Hinged.

ACABADOS
Finishes

Blanco, color, bicolor e imitación a madera y metalizado. White, coloured, two-colour, wood look and metallic finish.

